

FIRE SAFETY CERTIFICATE

No.109/SFO/JDM/2024

Dated: 25-03-2024

Certified that the CMR SCHOOL, SYNOS:91(P), 92,93, 152(P), 159, 160, 161, 162, 163(P), 164, 165, 167, 168/1, 168/2, 169, 170 & 171, NJR & KLR NAGAR SITUATED AT MEDCHAL VILLAGE & MUNICIPALITY, MEDCHAL MANDAL, MEDCHAL MALKAJGIRI DIST, TELANGANA/-

Consisting of Block -1 comprised of Cellar + (04) four upper floors occupied by CMR SCHOOL, have complied with the fire prevention and fire safety requirements in accordance with rule of State / UT Fire Service Rules, and verified by the officers concerned of Fire Service on 25-03-2024 in the presence of CHAMAKURA SRISAILAM REDDY (Secretary) PLOT No 1, Jayanagar Colony, New Bowenpally, Secunderabad, Telangana, India and that the buildings/premises is fit for occupancy upto **Classes X** With effect from 25-03-2024 for a period of five (5) year in accordance with rule and subject to compliance of specific conditions as appended

- 1.
- 2.
- 3.
- 4.

Issued on 25-03-2024 at JEEDIMETLA by

*Strike out whichever is not applicable.

Signature with Seal:

Name

Designation

Name & Address of Department/ Office:

Ch. S. J.
25/03/24
Station Fire Officer
Fire Station Jeedimetta
Chamakura Srisailam Reddy

:Station Fire Officer ...

To

CMR SCHOOL
(under MRC EDUCATIONAL SOCIETY
SYNOS: 91(P), 92, 93, 152(P), 159,160,
161, 162, 163(P),
164, 165, 167, 168/1, 168/2, 169, 170 & 171

NJR & KLR NAGAR SITUATED AT
MEDCHAL VILLAGE &
MUNICIPALITY, MEDCHAL
MANDAL, MEDCHALMALKAJGIRI
DIST, TELANGANA/

ENDORSEMENT

The No Objection Certificate issued by Fire Service stand cancelled an annulled due to

.....
(reasons to be recorded).

(Name and designation of the authorized signatory)

Ch. S. J.
Secretary & Correspondent
CMR School Medchal

Tanj
Principal
CMR School, Medchal

The filled up certificate should be either in Hindi or English. If it is issued in vernacular language, a certified/notarized version in English be uploaded along with the original vernacular certificate as a single pdf.



**GOVERNMENT OF TELANGANA
STATE DISASTER RESPONSE & FIRE SERVICES DEPARTMENT
NO OBJECTION CERTIFICATE**



From Dy. Director, TSFS & CDTI, State Disaster Response and Fire Services, Telangana, Hyderabad.	To, M R C EDUCATIONAL SOCIETY, NJR & KLR NAGAR SITUATED AT MEDCHAL VILLAGE & MUNICIPALITY, MEDCHAL MANDAL, MEDCHAL-MALKAJGIRI DIST, TELANGANA.
--	--

Re. No.516290002024 Dated:19/02/2024

Sir,	
Sub:	TELANGANA STATE DISASTER RESPONSE & FIRE SERVICE DEPARTMENT —Kukatpally Division, Issue of No Objection Certificate for OCCUPANCY to the Non Multi storeyed Building of CMR SCHOOL,SY NOS: 91(P),92,93,152(P),159,160,161,162, 163(P),164,165,167,168/1, 168/2,169,170&171, NJR & KLR NAGAR SITUATED AT MEDCHAL VILLAGE & MUNICIPALITY, MEDCHAL MANDAL, MEDCHALMALKAJGIRI DIST, TELANGANA/-Medchal/Medchal/Medchal, Hyderabad – Regarding.



Ref:	1. Acknowledgement No516290002024 dt.19/02/2024 2. This Office Provisional NOC Ack No./RC No.473850002022 dt.04/01/2023 3. Inspection Committee Report, Ack No. 516290002024, dt. 19/02/2024 *****
------	---

1. The Non Multi Storeyed Building Inspection committee, vide reference cited (3) have inspected the Non Multi Storeyed Building of CMR SCHOOL,SY NOS: 91(P),92,93,152(P),159,160,161,162, 163(P),164,165,167,168/1, 168/2,169,170&171, NJR & KLR NAGAR SITUATED AT MEDCHAL VILLAGE & MUNICIPALITY, MEDCHAL MANDAL, MEDCHALMALKAJGIRI DIST, TELANGANA/-Medchal/Medchal/Medchal and submitted the following report.

2. The builder was issued Provisional No Objection certificate vide reference cited (2) for construction of Non Non Multi Storeyed Building 1 Cellars, Ground, 3 Floors, with for Occupancy (). Now the builder has constructed Non Multi Storeyed Building with 1 Cellars, Ground, 3 Floors, with a height of 14.85 Meters for EDUCATIONAL B-1 Schools up to senior secondary level Occupancy () and requested for No Objection Certificate for Occupancy.

3. Open Spaces : The builder provided the following open spaces all around the building.

Sl.No	side	Open space Required as per Provisional No Objection Certificate	Open space Provided
1	North	6.00	7.00
2	South	6.00	6.00
3	East	6.00	6.00
4	West	6.00	6.00
5	Front Direction	North	

4. Means of Access :

Sl. No	Gate Width As per NBC 2016	Required	Provided
1	Entry gate width	6.00	6.00
2	Exit Gate Width	6.00	6.00

Secretary & Correspondent
CMR School Medchal

Principal
CMR School Medchal



**GOVERNMENT OF TELANGANA
STATE DISASTER RESPONSE & FIRE SERVICES DEPARTMENT
NO OBJECTION CERTIFICATE**



3	Entry Gate Head Clearance	4.50	4.50
4	Exit Gate Head Clearance	4.50	4.50

5. Travel Distance

Sl. No.	Item / Description	Required (Not More than in Mtrs.)	Provided
1	Farthest point (Most Remote Point) With in a storey or a mezzanine floor to the door to an Exit.	30.00	22.82
2	The Dead end of the corridor length in exit access. (6 mtrs for Educational, Institutional and Assembly, 15mtrs for other Occupancies)	6.00	6.00

6. Stair Cases (As per NBC 2016)

Sl.no.	Type of staircases	Width (In Mtrs)	No of staircases	Floors from	Floors to
1	Internal staircases	1.90	2	Cellar	Terrace
2	External staircases	1.50	1	Cellar	Terrace
3	Ramp(Used for Movement of vehicles)	5.40	1	Cellar	Ground

7. Means of Escape Floor Wise Details

Sl.no	Floor type	Buil-up Area in Sq.Mtrs	Type of Occupancy	Occupant Load	Means of escape required as per table 21 of NBC	Means of escape Provided
1	Cellar	1597.47	Parking	53.00	0.53	5.30
2	Ground	1444.64	EDUCATIONAL B-1 Schools up to senior secondary level	361.00	3.61	5.30
3	1st Floor	1444.64	EDUCATIONAL B-1 Schools up to senior secondary level	361.00	3.61	5.30
4	2nd Floor	1444.64	EDUCATIONAL B-1 Schools up to senior secondary level	361.00	3.61	5.30
5	3rd Floor	1444.64	EDUCATIONAL B-1 Schools up to senior secondary level	361.00	3.61	5.30

8. Floor Wise details of Fire Fighting Installations.

Sl.no	Floor Details	Fire Extinguisher	Hose Reel	Automatic Sprinklers System	Manually Operated Electronic Fire Alarm System	Automatic detection and alarm system
1	Cellar	8.00	2.00	178.00	0.00	0.00
2	Ground	8.00	2.00	0.00	0.00	0.00
3	1st Floor	8.00	2.00	0.00	0.00	0.00
4	2nd Floor	8.00	2.00	0.00	0.00	0.00
5	3rd Floor	8.00	2.00	0.00	0.00	0.00

9. Fire Fighting Installations as per Table 7 of NBC 2016:

Fire Fighting System.	Required As per NBC	Provided
Fire Extinguishers	40.00	40
First Aid Hose Reel	10.00	10
Automatic Sprinkler System	178.00	178
Capacity of Terrace Tank over Respective Tower Terrace in Litres	15000.00	15000
Pump capacity in LPM at the Terrace Tank level with min Pressure of 3.5 Kg/CM ²	900.00	900
No. of Terrace Tanks over Respective Tower in ltrs	1	1

Secretary & Correspondent
CMR School Medchal

Principal



**GOVERNMENT OF TELANGANA
STATE DISASTER RESPONSE & FIRE SERVICES DEPARTMENT
NO OBJECTION CERTIFICATE**



No. of Pumps at the Terrace Tank level with min pressure of 3.5 Kg/Cm² | 1 | 1

10. The builder has provided the following additional Fire Safety Requirements as per NBC of India 2016 as per NBC part 4 of India 2016::

Sl. No	Fire safety Item
1.	Open spaces all around the building are Leveled and have hard open spaces for the operation of fire vehicles.
2.	The upper floors of the educational building are provided with exits for every travel distance of 30 meters (TYPE I & 2 constructions) as per table 5 under clause 4.4.2.1, 4.4.2.2 of Part IV of NBC 2016
3.	The width of all exit door ways has 01-00 meter for class rooms and 02-00 meters in respect of Assembly halls as per clause 8.1 of IS 14435:1997?
4.	The height of exit door ways has 02-00 meters and more, as per clause of 8.2 of IS 14435:1997?
5.	A minimum number of two separate exits are provided for each floor as per clause 6.2 of IS 14435:1997?
6.	The exits shall be remote from each other as practicable as per clause 6.2 of IS 14435:1997?
7.	02 Doorways are provided for every room with a capacity of over 45 persons As per clause 6.2.2(a) of part-IV of NBC-2016
8.	The Location of Rooms of Preschool, Kindergarten, Class/Grade I student are provided at Ground Floor/level and Class/Grade II student at ground or First Floor only.
9.	The building is suitably Compartmented and provided with smoke control measures so that fire / smoke remain confined to the area where fire incident has occurred and does not spread to the remaining part of the building as per Clause 4.5 and 4.6 of part 4 NBC of India 2016.
10	Floor Openings Fire Protection Complied with As per Clause 3.4.5.4
	a) Openings in Service ducts and shafts allowing building services like cables, Electrical wirings, Telephone cables, plumbing pipes etc., shall be protected by enclosure in the form of ducts / shaft having a fire resistant's not less than 120 min.
	b) The inspection door for electrical shafts / ducts shall be not less than 120 min.
	c) Medium and low voltage wiring running in shafts / ducts shall either be armoured type or run through metal conduits.
	d) The space between the electrical cables/conduits and the walls/slabs shall be filled in by a fire stop material having fire resistance rating of not less than 120 min. This shall exclude requirement of fire stop sealing for low voltage services shaft.
	e) For plumbing shafts in the core of the building, with shaft door opening inside the building, the shafts shall have inspection doors having fire resistance rating not less than 30 min..
11	Vertical openings Fire Protection Complied with as per Clause- 3.4.5.6 Every vertical opening between the floors of a building shall be suitably enclosed or protected, as necessary, to provide the following:
	a) Reasonable safety to the occupants while using the means of egress by preventing spread of fire, smoke, or fumes through vertical openings from floor to floor to allow occupants to complete their use of the means of egress. Further it shall be ensured to provide a clear height of 2 100 mm in the exit access.
	b) Limitation of damage to the building and its contents.
12	Electrical safety complied with as per Clause 3.4.6 of part – 4 NBC of India 2016
	a) the wiring and cabling are having flame retardant property. Medium and low voltage wiring running in shafts and within false ceiling shall run in metal conduit. Any 230 V wiring for lighting or other services, above false ceiling, shall have 660 V grade insulation
	b) the electric distribution cables/wiring shall be laid in a separate shaft. The shaft shall be sealed at every floor with fire stop materials having the same fire resistance as that of the floor. High, medium and low voltage wiring running in shaft and in false ceiling shall run in separate shaft/conduits.
	c) water mains, gas pipes, telephone lines, intercom lines or any other service line shall not be laid in the duct for electrical cables; use of bus ducts/solid rising mains instead of cables is preferred.
	d) all metallic items like steel structural members, etc, shall be bonded properly to the earthing system.
13	Lightning protection of buildings is Complied with as per clause – 3.4.6.5

Secretary & Correspondent
CMR School Medchal

Principal
CMR School, Medchal

Page 3/5



**GOVERNMENT OF TELANGANA
STATE DISASTER RESPONSE & FIRE SERVICES DEPARTMENT
NO OBJECTION CERTIFICATE**



- Routing of down conductors (insulated or uninsulated) of lightning protection through electrical or other service shafts are not allowed as it can create fire and explosion during lightning. For details, see Part 8. Building Services, Section 2 Electrical and Allied Installations' of the Code
- 14 **Escape Lighting and Exit Signage is Complied with as per Clause 3.4.7**
Exit access, exits and exit discharge shall be properly identified, with adequate lighting maintained in the elements of the egress systems so that all occupants shall be able to leave the facility safely.
- 15 **Lighting is Complied with as per Clause – 3.4.7.1**
- a) The exit, exit access and exit discharge systems shall be illuminated continuously. The floors of the means of egress shall be illuminated at all points, including angles and intersections, in corridors and passageways, stairwells, landings of stairwells and exit.
- b) Emergency lighting shall be powered from a source independent of that supplying the normal lighting.
- c) The emergency lighting shall be provided to be put on within 5 s of the failure of the normal lighting supply. Also, emergency lighting shall be able to maintain the required illumination level for a period of not less than 90 min in the event of failure of the normal lighting even for smaller premises.
- d) Signs are required at all exits, emergency exits and escape routes, which should comply with the graphic requirements of the relevant Indian Standards
- 16 Exit passageway (at ground) and staircase lighting is connected to alternative supply. The alternative source of supply may be provided by battery continuously trickle charged from the electric mains as per clause – 3.4.7.2
- 17 Number of exits. Arrangements of exits and capacities of Means of egress types of exit access and exits etc., complied with Clause 4.4.2 of part – 4 NBC of India 2016
- 18 Smoke control of exits are complied with Clause 4.4 2.5of part – 4 NBC of India 2016
- 19 **Fire Drills and Fire orders Complied with Clause 4.11 of part – 4 NBC of India 2016**
Fire notices/orders shall be prepared to fulfil the requirements of firefighting and evacuation from the buildings in the event of fire and other emergency. The occupants shall be made thoroughly conversant with their action in the event of emergency, by displaying fire notices at vantage points and also through regular training. Such notices should be displayed prominently in bold lettering. For guidelines for fire drills and evacuation procedures for high rise buildings, see Annex D
- 20 Fire extinguishers / fixed fire fighting installations, static water storage tanks and pump house are Complied with Clause 5.1 of part – 4 NBC of India 2016
- 21 Automatic sprinkler installation shall be complied with as per Clause 5.1.3 of part – 4 NBC of India 2016 (If Basement exceeds 200 sq. Mtr. Area)
- 22 Fire Safety plans prepared and submitted by the builder.
- 23 Fire Drills shall be conducted with accordance with the fire safety plan at least once in every 03 months for building during the first 02 Years and there after once in 6 months as per Clause D-3 in annex. D of Part IV NBC of India 2016.

11) In view of the above and as per recommendations of the multistoried building inspection Committee, the No Objection Certificate for occupancy is issued to Non Multi Storied Building with

Sl No	As Builder	As occupant	As Security Personnel
1	-All the fire protection arrangements shall be maintained in good condition as seen during inspection. -Do's and Don't in case of fire shall be prominently displayed in entire building	All the escape/exit roots shall not be kept locked/blocked or encroached	All the occupants must know the correct method of operation of the fire fighting system installed.
2	Any loss of life or property due to non-	All occupants shall be trained	Mock drills should be conducted once in 3

[Signature]
**Secretary & Correspondent
CMR School Medchal**

[Signature]
**Principal
CMR School Medchal**
Page 4/5



**GOVERNMENT OF TELANGANA
STATE DISASTER RESPONSE & FIRE SERVICES DEPARTMENT
NO OBJECTION CERTIFICATE**




	functioning of fire safety measures and other installations shall be the responsibility of the management.	to operate the fire safety equipments during emergency.	months for initial two years. Thereafter, once in every 6 months.
3	Addition / alteration, if any in the building may be verified by building authority.	Mock drills should be conducted once in 3 months for initial two years. Thereafter, once in every 6 months.	All security personnel shall be trained to operate the fire safety equipments during emergency and guiding the occupants in safe evacuation. Call the fire Brigade by dialing 101.
4	This No objection Certificate for occupancy is valid for five year from the date of issue of this letter.	Raise the alarm if the fire cannot be controlled, evacuate the area completely at once from the nearest safe exit.	Attack the fire using available fire equipment only if you feel capable of controlling it. If Not, take all steps to isolate the area by closing doors and windows.

12. Additional Fire Safety Measures Recommended by the Department:

1) All provided fire safety systems in the building shall always be maintained in good working condition and if any loss of property human life or any eventuality took place due to nonfunctioning of the fire fighting systems, the builder/management shall be held total responsibility. 2) The provided open spaces all around the building shall be maintained always without any obstructions. 3) The applicant shall ensure the Annual Maintenance Contract of all fire safety measures provided in the building. 4) Mock Fire Drills shall be conducted once in every 6 months duly associating with local Fire Officer and the same shall be recorded. 5) All electrical fittings shall be audited regularly and any damaged material shall be replaced wherever required. 6) Security personnel/other staff shall be trained in usage of basic fire fighting equipment and they shall undergo the short term training programmes conducted in the Fire Services Department Training Institute. 7) Good house keeping shall be maintained throughout the premises.

This No Objection Certificate for Occupancy is valid for Five years from the date of issue of this letter. It is the responsibility of the builder to apply for renewal NOC, duly remitting the user charges as per G.O. Ms. No. 71, Home (Prison - A) Department, dated 01-04-2010, two months before expiry of this No Objection Certificate.

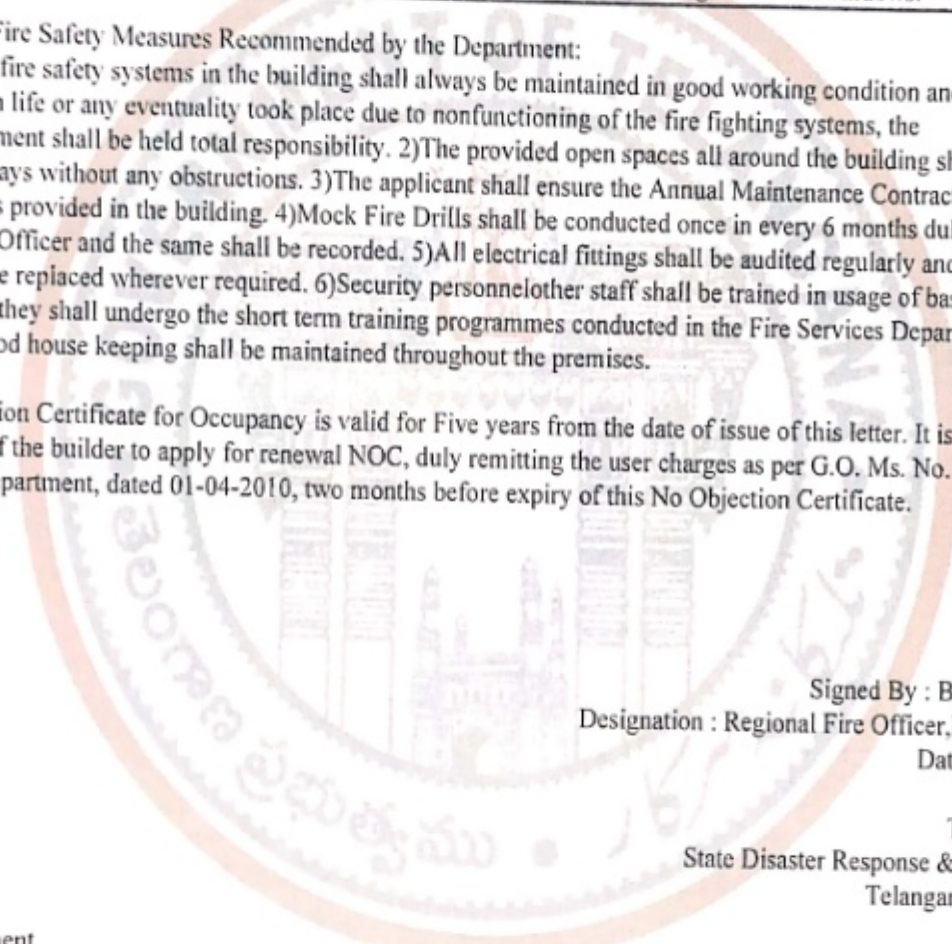

Signed By : B.Sudhakar Rao
Designation : Regional Fire Officer, DD, TFSCDTL
Date : 19-02-2024
Dy. Director,
TSFS & CDTL,
State Disaster Response & Fire Services,
Telangana, Hyderabad.

Copies to:

- i) The Management
- ii) Non Multistoried Building Inspection Committee
- iii) Copy submitted to Regional Fire officer
- iv) Copy submitted to DG fire services.

"THIS IS COMPUTER GENERATED DOCUMENT AND DO NOT REQUIRE ANY STAMP OR SIGNATURE"

Ch. S...

**Secretary & Correspondent
CMR School Medchal**

Tanj
**Principal
CMR School, Medchal**